


EXISTING WINDOW SCHEDULE						
SYM.	WIDTH	HIGH	TYPE	FRAME	REMARKS	NOTES
①	4'-0"	4'-0"	SLIDER	VINYL	DBL SAFETY GLAZING FROSTED	KEEP
②	6'-8"	4'-0"	SLIDER	VINYL	DBL GLAZING	KEEP
③	4'-0"	6'-4"	SLIDER	VINYL	DBL GLAZING	KEEP
④	4'-0"	6'-4"	SLIDER	VINYL	DBL GLAZING	KEEP
⑤	3'-10"	6'-4"	SLIDER	VINYL	DBL GLAZING	DELETE
⑥	3'-10"	6'-4"	SLIDER	VINYL	DBL GLAZING	DELETE
⑦	3'-10"	6'-4"	SLIDER	VINYL	DBL GLAZING	DELETE
⑧	4'-4"	2'-8"	SLIDER	VINYL	DBL GLAZING GARDEN	DELETE
⑨	4'-0"	3'-0"	SLIDER	VINYL	DBL GLAZING	KEEP
⑩	1'-0"	5'-0"	PICTURE	VINYL	DBL GLAZING	DELETE
⑪	3'-10"	5'-0"	SLIDER	VINYL	DBL GLAZING	DELETE
⑫	4'-0"	6'-4"	SLIDER	VINYL	DBL SAFETY GLAZING	KEEP
⑬	3'-0"	6'-4"	SLIDER	VINYL	DBL SAFETY GLAZING	KEEP
⑭	NOT USED					
⑮	4'-0"	4'-6"	SLIDER	VINYL	DBL SAFETY GLAZING	KEEP
⑯	2'-0"	2'-0"	FIXED	ALUMN	VELUX SKYLIGHT	KEEP

EXISTING DOOR SCHEDULE							
SYM.	WIDTH	HIGH	THK	S/H	MATERIALS	REMARKS	NOTES
①	3'-0"	6'-8"	1 3/4"	SOLID	WOOD	PAINTED WOOD ENTRY DOOR	DELETE
②	16'-0"	7'-0"	1 3/4"	SOLID	WOOD	PAINTED WOOD GARAGE DOOR	KEEP
③	2'-6"	6'-8"	1 3/4"	SOLID	WOOD	PAINTED EXTERIOR DOOR	KEEP
④	2'-0"	6'-8"	1 3/4"	SOLID	WOOD	PAINTED EXTERIOR DOOR	KEEP
⑤	5'-8"	6'-8"	1 3/4"	HOLLOW	VINYL	SLIDING PATIO DOOR TEMP. GLAZING	DELETE
⑥	1'-10"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP
⑦	5'-8"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR SLIDING	KEEP
⑧	2'-4"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP
⑨	1'-3"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP
⑩	2'-6"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP
⑪	3'-10"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR SLIDING	KEEP
⑫	2'-4"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP
⑬	3'-10"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR SLIDING	KEEP
⑭	2'-6"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP
⑮	NOT USED						
⑯	NOT USED						
⑰	2'-4"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP
⑱	2'-6"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED 20MIN SELF CLOSING DOOR	DELETE
⑲	NOT USED						
⑳	3'-6"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR BARN DOOR	KEEP
㉑	2'-8"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP
㉒	2'-6"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR BARN DOOR	KEEP
㉓	5'-0"	6'-8"	1 3/4"	HOLLOW	VINYL	EXTERIOR VINYL FRENCH DBL SAFETY GLAZING	KEEP
㉔	2'-6"	6'-8"	1 3/8"	HOLLOW	WOOD	PAINTED INTERIOR DOOR	KEEP


EXISTING EXTERIOR WALL LENGTH
 $18'-9" + 23'-2" + 4'-7" + 4'-7" + 29'-11" + 5'-5" + 5'-2" + 2'-2" + 32'-1-3" + 7'-10" + 9'-0" + 4'-8" + 10'-8" + 6'-1" + 48'-2" + 52'-8" = 265'-1"$

EXTERIOR WALLS TO BE REMOVED
 $25'-0" + 6'-0" + 3'-0" + 4'-4" + 3'-0" + 4'-7" + 4'-7" = 50'-6"$

4.408.1 Construction waste management. Recycle and/or salvage for reuse a minimum of 65% of the nonhazardous construction and demolition waste.

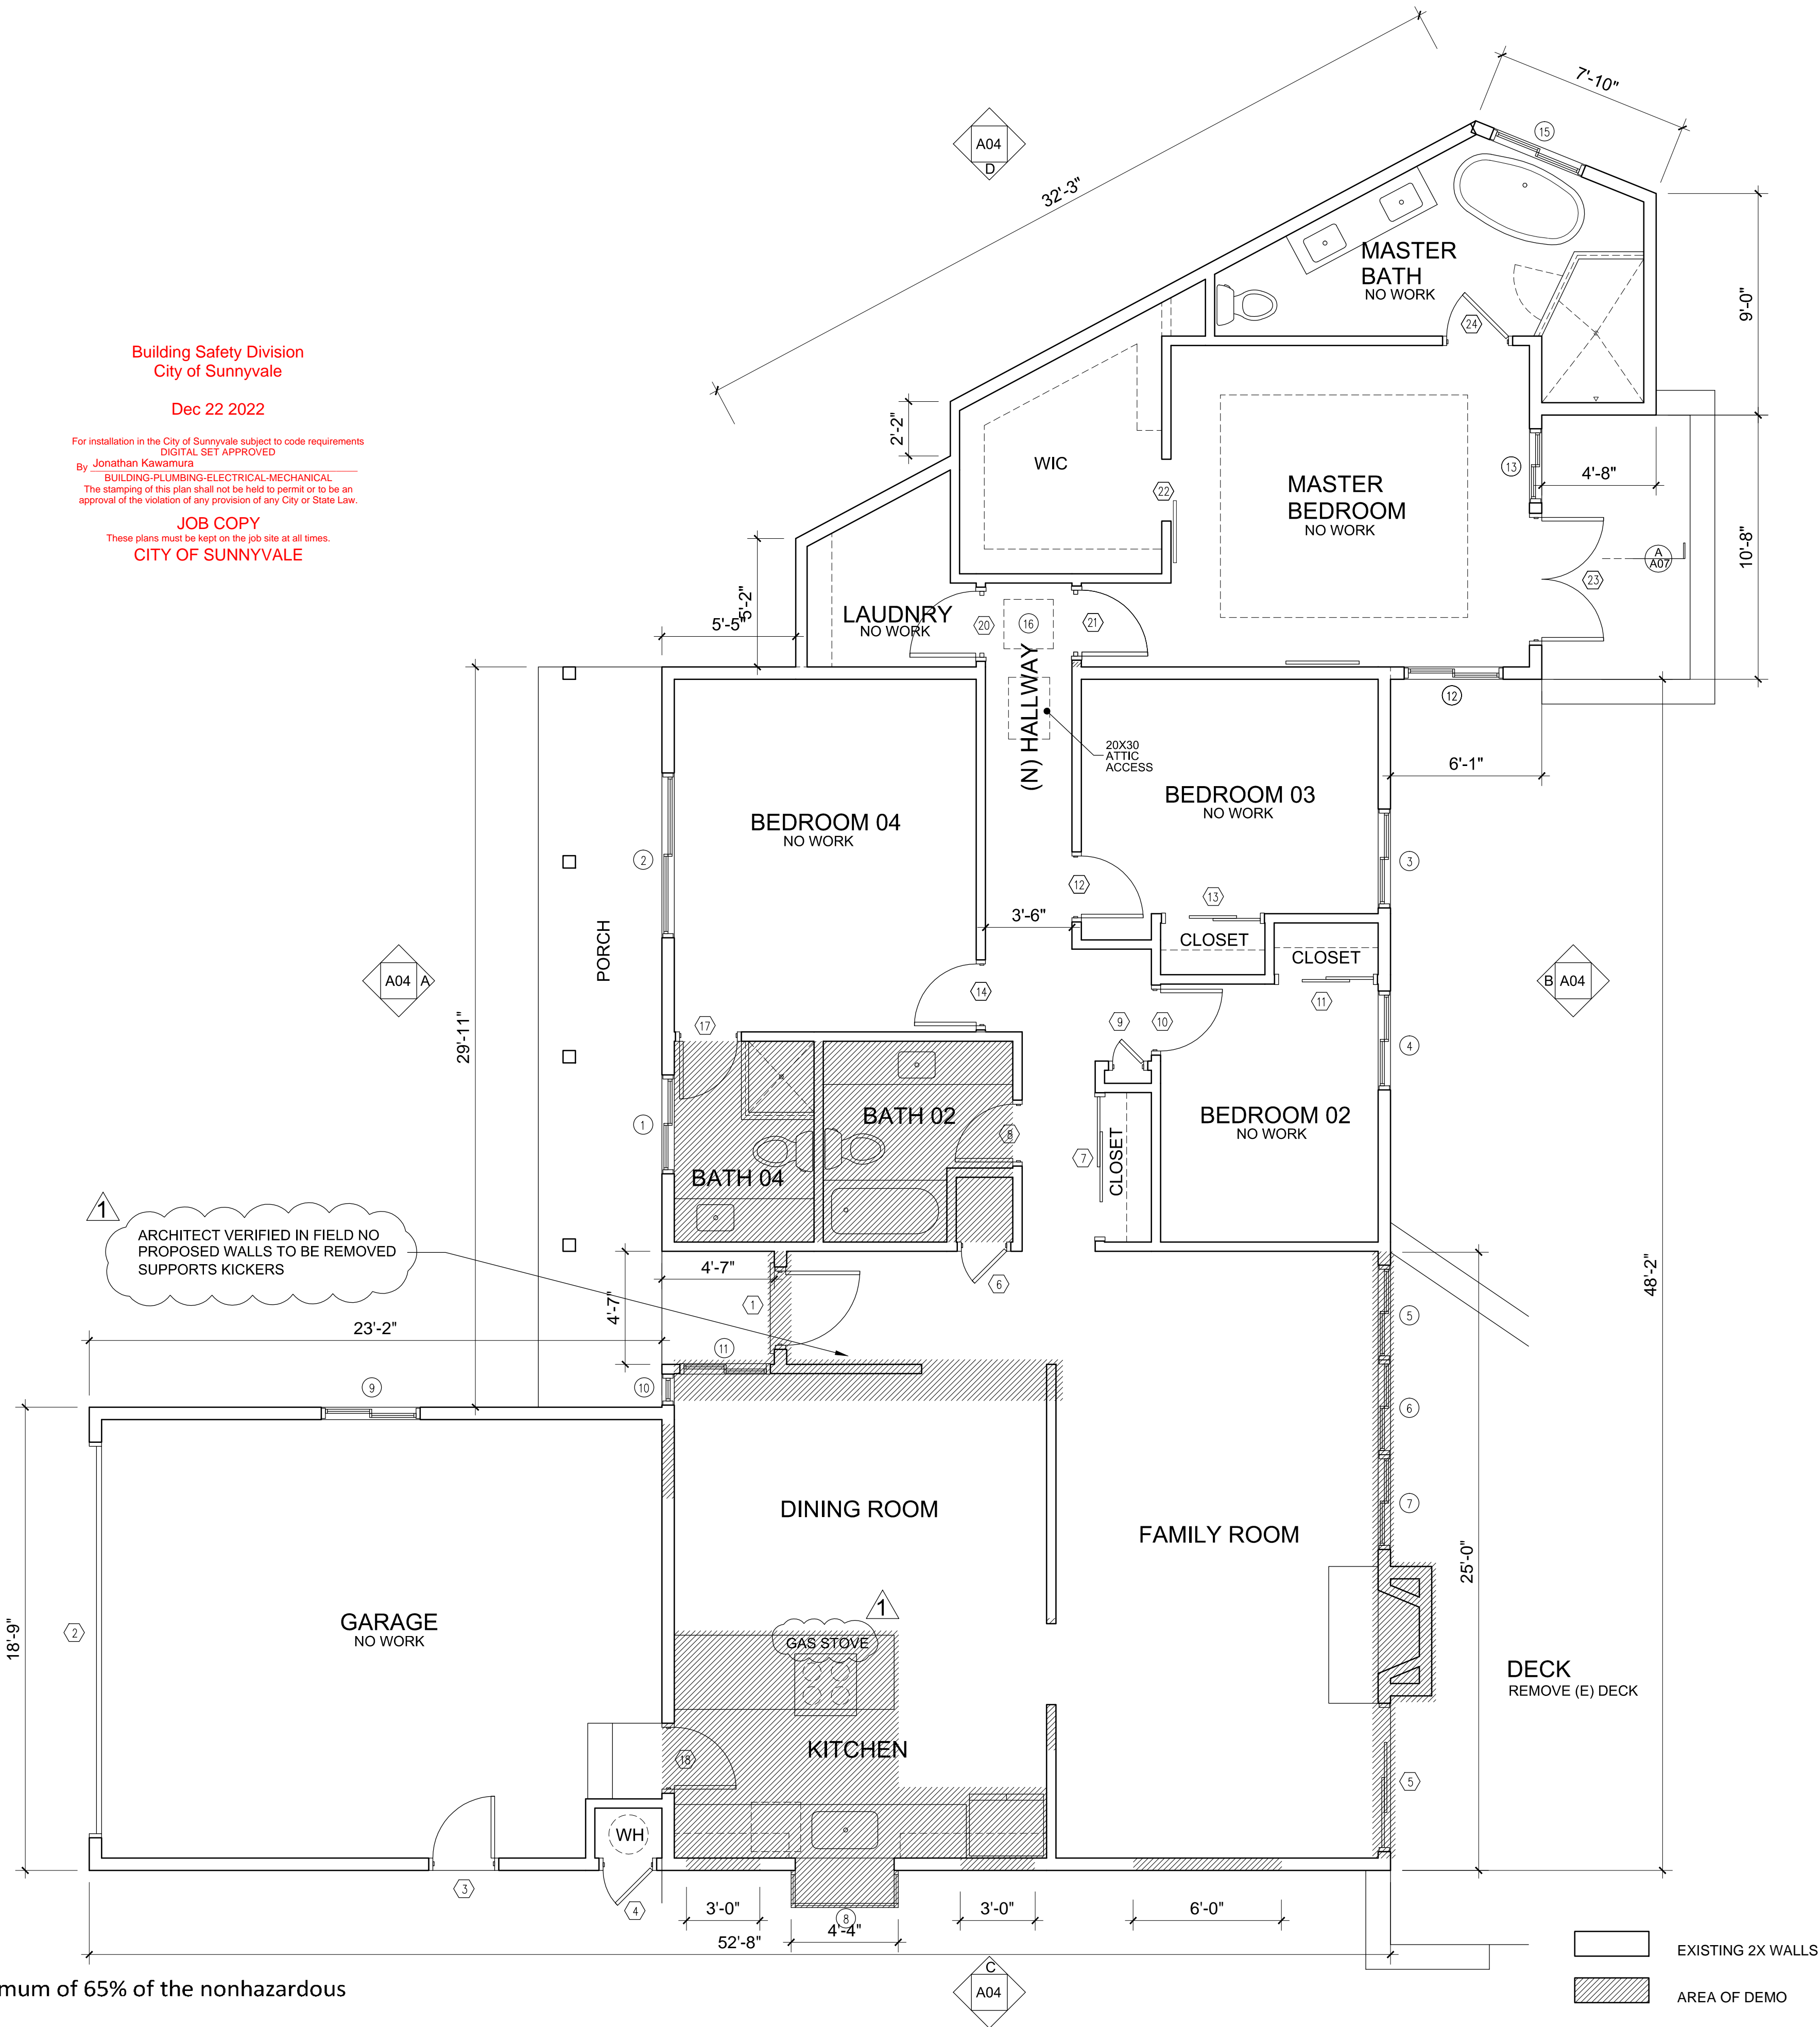


EXISTING FLOOR AND DEMO PLAN



PHAN ARCHITECTS

870 S WOLFE RD SUNNYVALE CA 94086
T: 1.408.737.8323 F: 1.408.737.2357
www.phangroup-us.com



PROJECT:
721 GLENCOE CT.
ADDITION

ADDRESS:
721 GLENCOE CT.
SUNNYVALE CA 94087

TITLE:
EXISTING
FLOOR AND
DEMO PLAN

REV.	DATE	REMARKS
01	11.22.2022	BUILDING

NOTES:

DRAWINGS AND SPECIFICATIONS AS INSTRUMENTS OF SERVICE ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT. THE DRAWINGS AND SPECIFICATIONS SHALL NOT BE USED ON OTHER PROJECTS, FOR ADDITIONS TO THIS PROJECT BY OTHERS EXCEPT BY AGREEMENT IN WRITING WITH THE ARCHITECT. ANY USE OR RE-PRODUCTION OF THIS DRAWING IN WHOLE OR PART BY ANY MEANS IS STRICTLY PROHIBITED EXCEPT WITH SPECIFIC WRITTEN CONSENT OF PHAN ARCHITECTS. COPYRIGHT 2022.

SUBMITTAL:
BUILDING

DRAWN BY:
PP
DATE:
JUNE 16 2022

SCALE:

SHEET NUMBER:

A02